

The Liquid Control IG20 & IG200 can be supplied in both 20lt. and 200lt. format. The machine can be configured for either direct gun or cartridge filling applications.

Designed to handle high viscosity sealants and adhesives where the base material is generally non-pourable, up to a viscosity level in excess of 1,000,000cps, the activator can be metered from a gravity reservoir, up to 25litre capacity.

Positive displacement pump combination to give accurate metering of mix ratios between 1:1 and 25:1 in fixed ratio format.


(Variable ratio also available)

Twinflow IG20 & IG200

The standard variable ratio piston pump machine for multi component flexible packaging adhesives



Hand held gun

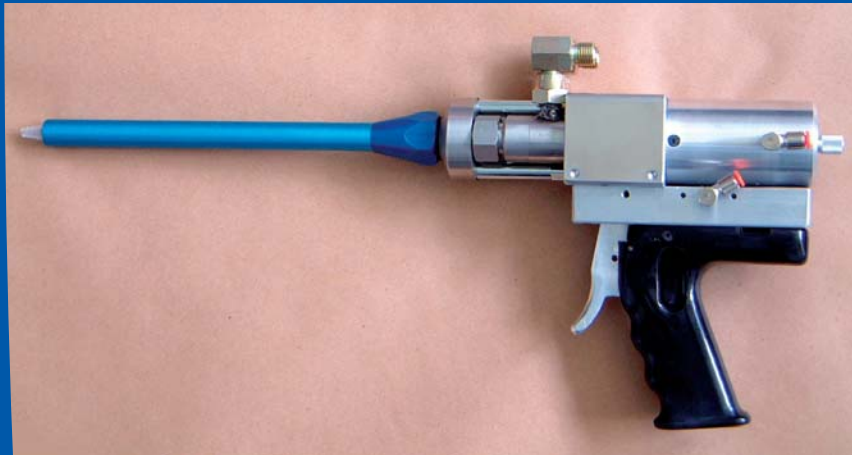


Cartridge fill options



Twinflow IG20 & IG200

Typical material systems

- Methacrylates
- Polyurethanes
- Polysulphides
- Epoxies
- Silicones

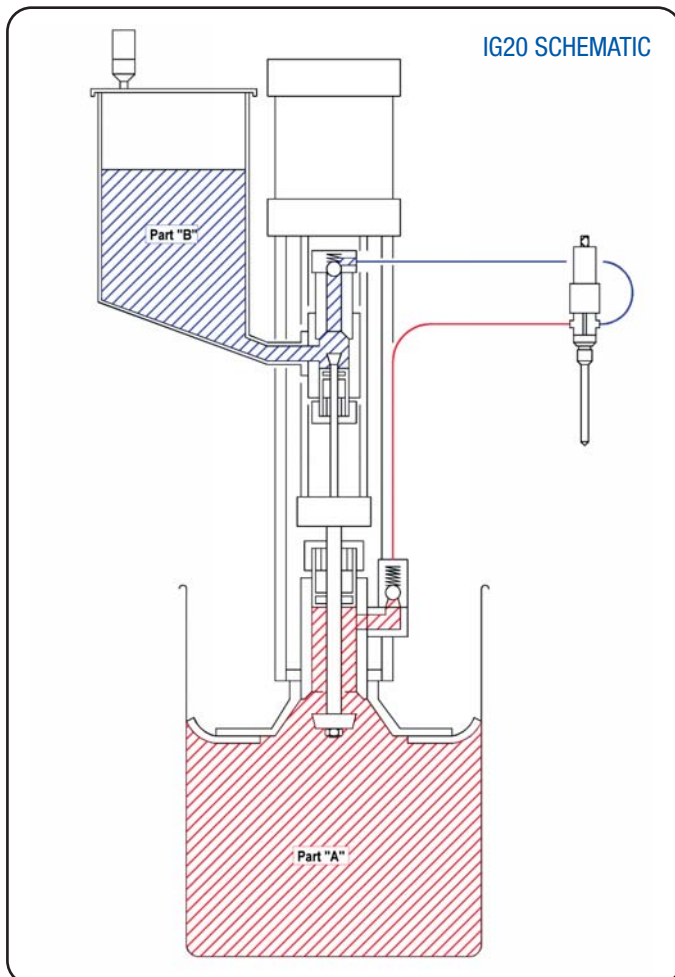

Standard Options

- Variable ratio
- Hose support boom
- Anti-gel purge timer
- Shot counter / repeater for multiple shot
- Both 20lt and 200lt
- Heating
- Reservoir stirring
- Stainless steel wetted parts
- Low-level alarms
- Static or rotary mixing heads
- Bulkfeed material supply

Liquid Control Limited

Stewarts Road, Finedon Road Industrial Estate
 Wellingborough, Northants NN8 4RJ, England
 Tel.: +44 (0) 1933 277571 - Fax: +44 (0) 1933 440273
www.liquidcontrol.co.uk

Products sold by Liquid Control Ltd are subject to ongoing development and improvement. The right is therefore to alter specifications without notice.